



**Product
overview**

Acoustic Timber™ Ceiling Tile is a simple, high-performance acoustic tile made from Accent Ceiling Tile™ designed to fit within standard grid systems and comply with typical loading standards. Made from non-woven, needle punched 100% polyester fibre, the tiles are lightweight and sturdy, so they will not chip, crack, or break.

Sustainable material

- Carbon neutral product
- Zero carbon manufacturing
- Recycled content
- >60% recycled material
- Low VOC and CDPH compliant
- <0.092 mg/m³ (7 days)
- Zero waste manufacturing initiative
- Sustainable supply chain and anti-modern slavery

**Environmental
certifications**

- EPD – compliant with ISO 14025 and EN 15804
- Declare – Red List free (third party verified)
- ISO 14001 Certified Environmental Management
- Health Product Declaration
- CDPH Standard



**Certifying your
green building**

Autex Acoustics products meet criteria for WELL, LEED, Green Star, and BREEAM building rating systems, helping you achieve certification for your project. For support and guidance on available rating system points please visit www.autexglobal.com, or speak with your Autex Acoustics account manager.

Specification

(Ceiling) treatment shall be Acoustic Timber Ceiling Tile from thermally bonded polyester containing not less than 60% recycled material as manufactured by Autex. www.autexglobal.com

Tile 595 mm x 1195 mm x 12 mm depth, or 595 mm x 595 mm x 12 mm depth, colour () suspended square edge, sound absorption: Class A,

NRC 0.85. Fire rating ISO9705: Classification: Group 1-S, AS ISO 9705 – 2003: Group 1, BS EN 13501-1:2018: B – s2, d0,

Install as per Autex Acoustics recommendations. If Acoustic Timber Ceiling Tile is to be specified for use other than as a ceiling tile, please seek guidance from your account manager.



Product specifications

Product name	Acoustic Timber™ Ceiling Tile
Composition	100% polyester fibre (PET)
Panel dimensions	595 x 1195 mm
	595 x 595 mm
Tolerance	(+/- 2 mm) (- 5 mm)
Thickness	12 mm
Tolerance	(+/- 6%)

Installation

Install as per Autex Acoustics recommendations.

Install instructions are included in each pack or available on the website. In situations where product is being installed near fire protection systems (e.g. sprinklers or fire alarms) relevant building codes, standards and design rules must be adhered to. Please consult the project engineer and relevant expert such as a fire protection engineer.


Acoustic performance

Acoustic Timber Ceiling Tile is made using Accent Ceiling Tile. The effect of the printed surface has been tested and found to have no impact on the acoustic performance.

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
● Ceiling Tile 13 mm (300 mm air gap)	0.70	0.80	0.80	0.90	1.00	1.00	0.85

Table presents the practical sound absorption coefficients as according to ISO 11654. Graph presents third octave sound absorption coefficients (according to ISO 354 measurement of sound absorption in a reverberation room.) The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz. and rounded to the nearest 0.05.

Absorption Coefficient According ISO 354
University of Auckland Test Report Number
Accent Ceiling Tile 13 mm (300 mm air gap) - Test No. T1632-2

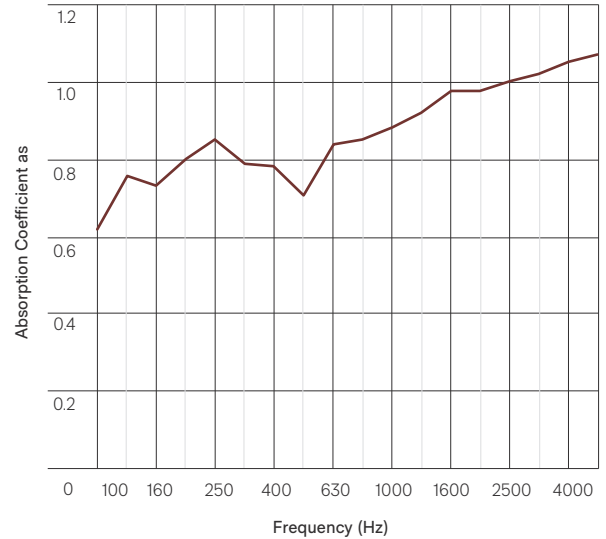

Product specifications

Fire ratings

Acoustic Timber Ceiling Tiles are made from Cube™ which has been tested and evaluated using the following test methods.

ISO 9705: 1993

Classification: Group 1-S
Smoke production rate:
<5.0m²/s
As required by NZBC C/VM2

AS ISO 9705 - 2003

Classification: Group 1
(SMOGR_{arc}): <100m²/s²
Assessed using methodology
AS ISO 9705 - 2003
in accordance with AS 5637:1.2015, as required
by BCA Specification C110-4
FAR 4055

BS EN 13501-1:2018

Ceiling applications
Classification: B-s2,d0
(Cube™ 12 mm)
Tested using BS EN ISO 11925-2:2020 and BS EN
13823:2020 and classified in accordance with BS
EN 13501-1:2018, as required by BS EN 13964:2014.
EUI-20-000268-B

Water vapour sorption

ASTM C1104 / C1104M-13a
Test conditions: 49°C, 95%RH
Water vapour absorbed and
adsorbed after 4 days:
0.4% by weight.

Impact resistance

Acoustic Timber Ceiling Tile
may show surface damage
when subjected to impacts.

We would advise against using
Acoustic Timber Ceiling Tile
in areas where there is likely to
be contact with the product.

Microbial resistance

ASTM G21-15
Growth rating: 0 (No growth)
Accent Ceiling Tile does not
promote the growth of moulds
and mildew.

Colour fastness to light

Acoustic Timber Accent Ceiling
Tile is suitable for indoor use
only. Light fastness is dependent
on use and exposure. Acoustic
Timber Accent Ceiling Tile has
been evaluated to the following
standard:
ISO 105-B02:2014
Rating: 6 (Highest = 7)

Pattern repeat

Acoustic Timber Ceiling Tiles
are made to replicate Timber
grains and there is a variation
from panel to panel to provide
the natural look. There is no
pattern repeat from tile to tile.

Blemishes

Due to the nature of the raw
material and the manufacturing
process, flecks and other small
surface blemishes may be
visible on the surface of Autex
Acoustics panels from time
to time. This is an inherent
characteristic of the textile
products and is unavoidable.

Fabric care

Avoid contact with the Acoustic
Timber Ceiling Tile surface.
Where liquids and other
contaminants come in contact
with the panels, these should
be gently removed immediately
and not allowed to soak in,
dry, or set. Refer to the product
Care and Maintenance for
cleaning guidance. Consult a
specialist cleaning company for
cleaning if required.

Back loading

None. All loads to be
independently supported or
transferred to the grid.
For questions and concerns
please contact your
account manager.

Service

For further information about
Acoustic Timber Ceiling Tile or
any other Autex Acoustics
product, please contact your
account manager
or visit our website.



Light reflectance values by colour

Acoustic Timber Ceiling Tiles are suitable for indoor use only. LRVs were measured in accordance with BS 8493:2008+A1:2010

Birch	58	Tasmanian Oak	28
American Ash	53	Blue Gum	18
Eucalyptus	46	Tasmanian Blackwood	17
Hoop Pine	45	Queensland Walnut	15
Oak	37	Jarrah	9

● **New Zealand**
702-718 Rosebank Road,
Private Bag 1998
Avondale 1746, Auckland
New Zealand
Freephone 0800 428 839
Phone +64 9 828 9179
Fax +64 9 828 5810

● **Australia**
285 Swan Street,
Richmond, VIC 3121,
Australia
Freephone 1800 678 160
Phone +61 3 9450 6700

● **United Kingdom**
Unit J4, Lowfields Way,
Lowfields Business Park,
Elland, West Yorkshire
HX5 9DA
United Kingdom
Phone +44 0 142 241 8899

● **United States**
1630 Dan Kipper Drive,
Riverside, CA 92507
United States of America
Phone +1 424 203 1813

Autex is an ISO certified organisation encompassing Quality (ISO 9001), Environmental (ISO 14001), and Health and Safety (ISO 45001). Brand names and logos are registered or unregistered trademarks owned or used under license by Autex Industries Limited or other members of the Autex Group. © Copyright 2022 Autex Industries Ltd. All rights reserved. It is the user's responsibility to determine if the product and information presented in this document is suitable for the intended application by engaging a suitably qualified consultant. The information contained in this document is correct to the best of our knowledge at the date of its publication. To verify that this document is the most current publication please check our website or contact your Autex account manager.